

NOTES:

ELECTRICAL SPECIFICATIONS:

MAIN VOLTAGE: 208-230V/3PH/60HZ
 MINIMUM CIRCUIT AMPACITY (MCA): 75 AMPS
 MAXIMUM OVERCURRENT PROTECTION (MOP): 120 AMPS

MAIN VOLTAGE: 460V/3PH/60HZ
 MINIMUM CIRCUIT AMPACITY (MCA): 38 AMPS
 MAXIMUM OVERCURRENT PROTECTION (MOP): 61 AMPS

WEIGHT SPECIFICATIONS:


ESTIMATED SHIPPING WEIGHT: APPROXIMATELY 1,900 LBS
 ESTIMATED OPERATING WEIGHT: APPROXIMATELY 2,800 LBS

COOLING CAPACITIES:


AT 90°F AMBIENT
 25 °F GLYCOL: 97896 BTU/HR (28.7KW)
 30 °F GLYCOL: 108763 BTU/HR (31.9KW)
 35 °F GLYCOL: 120337 BTU/HR (35.3KW)

SOUND PRESSURE LEVEL:


80 dB @ 1m

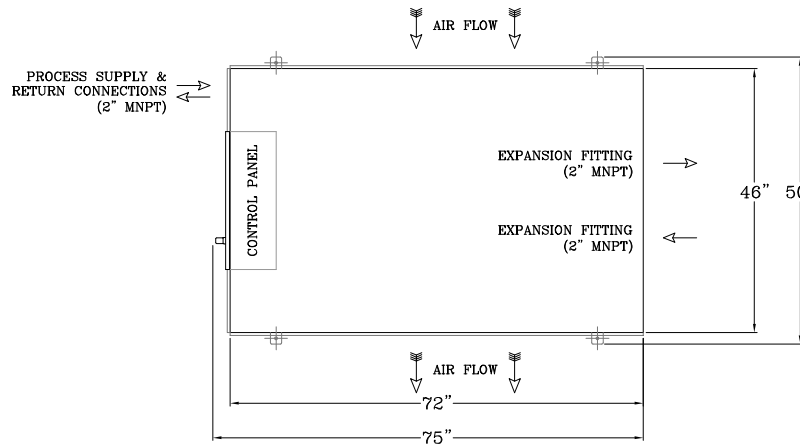

PLAN VIEW

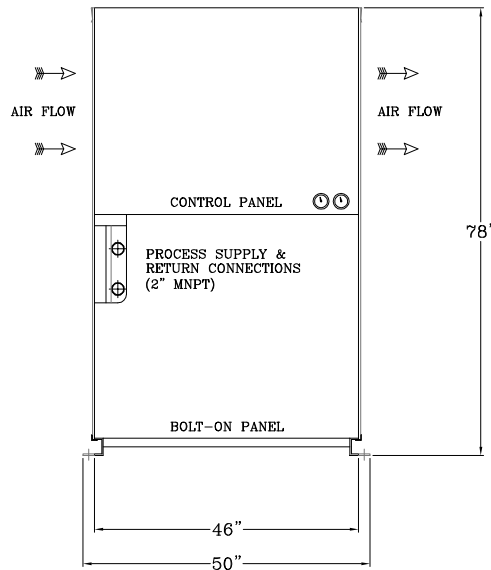

CONTROL PANEL END ELEVATION

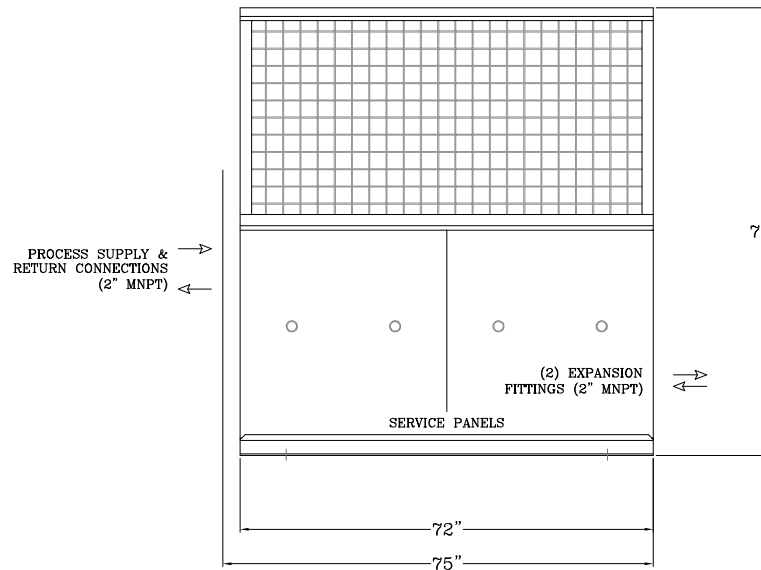

SIDE ELEVATION

Drawing No.:

101103004

Model:

PM112F3R4100-A

Customer:

SUBMITTAL

Drawn By:

-

Date:

-

Rev.	Date	Description
△ -	-	-

Notes:

- Options added to the chiller equipment (i.e. pumps, heat recovery, tank size, etc.) may affect the configuration (i.e. weight, dimensions, electrical requirements, etc.). Please verify final configuration of equipment.
- Dimensional tolerance: +/- 2" nominal.

PRO Refrigeration, Inc.

326 8th Street SW Auburn, WA 98001
 T: (253) 735-8466 / F: (253) 735-2631
 www.prochiller.com

