

**NOTES:**

**ELECTRICAL SPECIFICATIONS:**

MAIN VOLTAGE: 208-230V/3PH/60HZ  
 MINIMUM CIRCUIT AMPACITY (MCA): 92 AMPS  
 MAXIMUM OVERCURRENT PROTECTION (MOP): 119 AMPS

MAIN VOLTAGE: 460V/3PH/60HZ  
 MINIMUM CIRCUIT AMPACITY (MCA): 46 AMPS  
 MAXIMUM OVERCURRENT PROTECTION (MOP): 60 AMPS

**WEIGHT SPECIFICATIONS:**


ESTIMATED SHIPPING WEIGHT: APPROXIMATELY 2,900 LBS  
 ESTIMATED OPERATING WEIGHT: APPROXIMATELY 4,600 LBS

**COOLING CAPACITIES:**


AT 90 °F AMBIENT  
 25 °F GLYCOL: 127722 BTU/HR (37.4KW)  
 30 °F GLYCOL: 143936 BTU/HR (42.2KW)  
 35 °F GLYCOL: 161270 BTU/HR (47.3KW)

**SOUND PRESSURE LEVEL:**


80 dB @ 1m

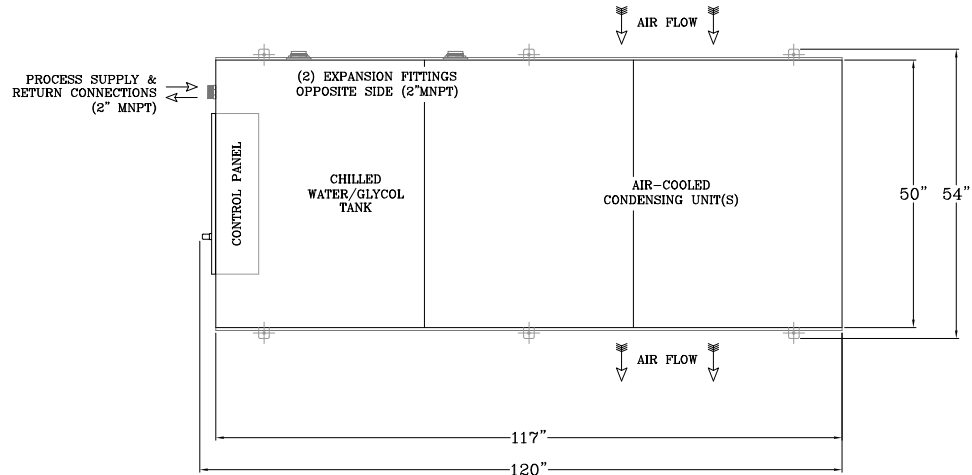

PLAN VIEW

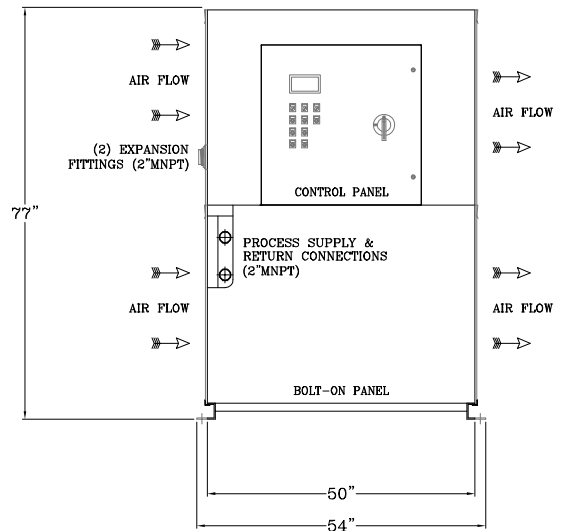

CONTROL PANEL END ELEVATION

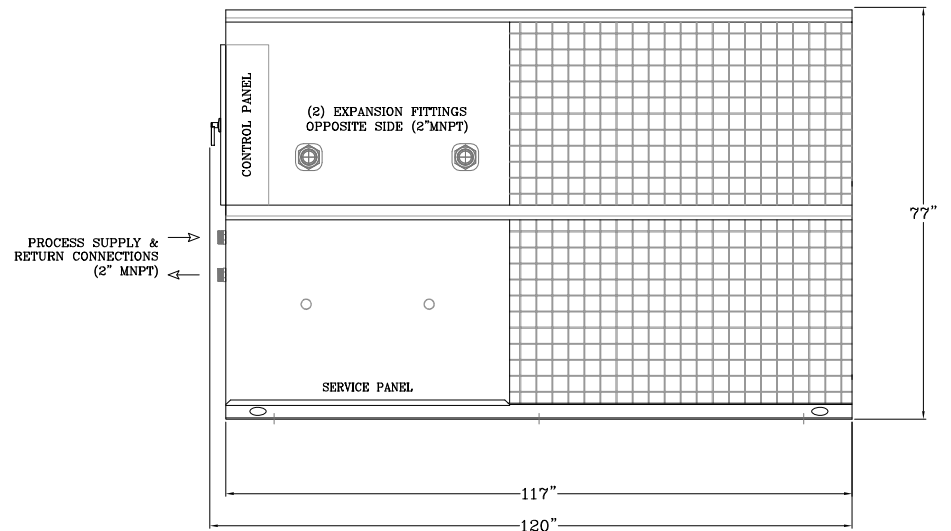

SIDE ELEVATION

Drawing No.:  
**101104002**

Customer:  
**Submittal**

Pro Model:  
**PM208F2R4200-A**

Drawn By: **MP** Date: **2/29/16**

Rev.	Date	Description
△	-	-

Notes:

- Options added to the chiller equipment (i.e. pumps, heat recovery, tank size, etc.) may affect the configuration (i.e. weight, dimensions, electrical requirements, etc.). Please verify final configuration of equipment.
- Dimensional tolerance: +/- 2" nominal.

**PRO Refrigeration, Inc.**  
 326 8th Street SW Auburn, WA 98001  
 T: (253) 735-9466 / F: (253) 735-2631  
 www.prochiller.com

