NOTES:

ELECTRICAL SPECIFICATIONS:
MAIN VOLTAGE: 208-230V/3PH/60HZ
MINIMUM CIRCUIT AMPACITY (MCA): 109 AMPS
MAXIMUM OVERCURRENT PROTECTION (MOP): 143 AMPS

MAIN VOLTAGE: 460V/3PH/60HZ
MINIMUM CIRCUIT AMPACITY (MCA): 54 AMPS
MAXIMUM OVERCURRENT PROTECTION (MOP): 71 AMPS

WEIGHT SPECIFICATIONS:
ESTIMATED SHIPPING WEIGHT: APPROXIMATELY 3,000 LBS
ESTIMATED OPERATING WEIGHT: APPROXIMATELY 4,700 LBS

COOLING CAPACITIES:
AT 90 °F AMBIENT
25 °F GLYCOL: 158714 BTU/HR (46.5KW)
30 °F GLYCOL: 177180 BTU/HR (51.9KW)
35 °F GLYCOL: 196900 BTU/HR (57.7KW)

SOUND PRESSURE LEVEL:
80 dB @ 1m

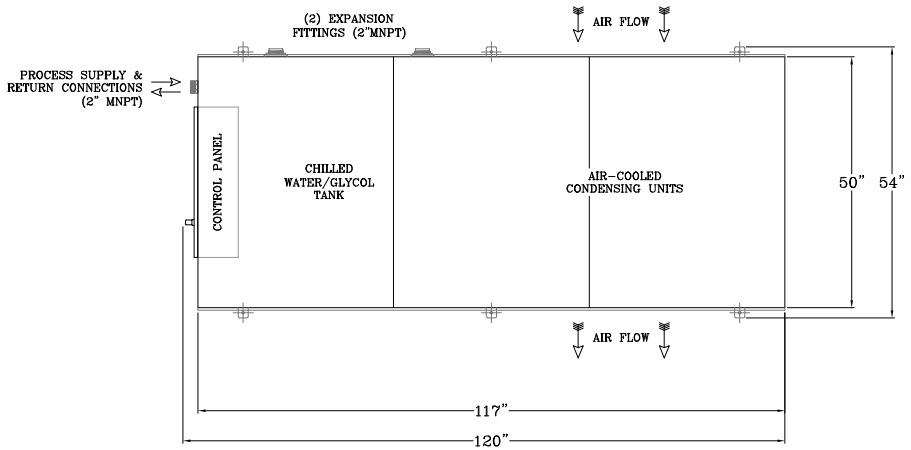

PLAN VIEW

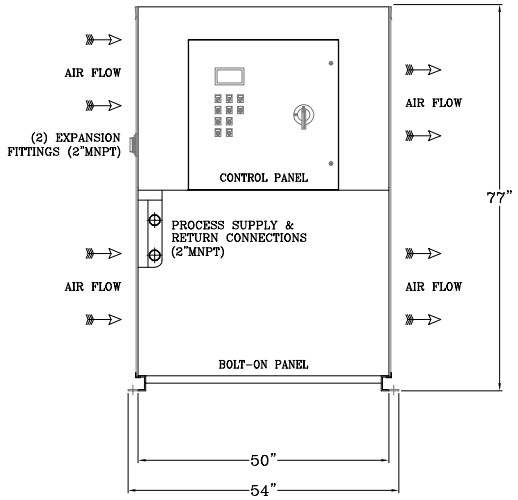

CONTROL PANEL END ELEVATION

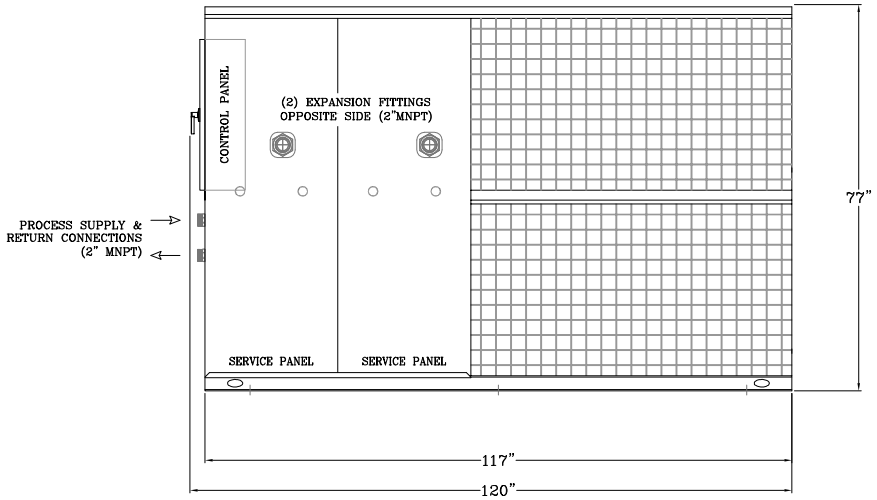

SIDE ELEVATION

Drawing No.:

101104003

Customer:

Submittal

Pro Model:

PM210F6R4200-A

Drawn By:	Date:
MP	2/29/16

Rev.	Date	Description
-	-	-

Notes:

1. Options added to the chiller equipment (i.e. pumps, heat recovery, tank size, etc.) may affect the configuration (i.e. weight, dimensions, electrical requirements, etc.). Please verify final configuration of equipment.

2. Dimensional tolerance: +/- 2" nominal.

PRO Refrigeration, Inc.
326 8th Street SW Auburn, WA 98001
T: (253) 735-9466 / F: (253) 735-2631
www.prochiller.com

PRO CHILLER • SYSTEMS