

Drawing No.:

101104004

Customer:

Submittal

Pro Model:

PM212F6R4200-A

Drawn By: Date:

MP 2/29/16

Rev. Date Description

△	-	-
---	---	---


Notes:

1. Options added to the chiller equipment (i.e. pumps, heat recovery, tank size, etc.) may affect the configuration (i.e. weight, dimensions, electrical requirements, etc.). Please verify final configuration of equipment.


2. Dimensional tolerance: +/- 2" nominal.

**PRO Refrigeration, Inc.**


326 8th Street SW Auburn, WA 98001  
 T: (253) 735-9466 / F: (253) 735-2631  
 www.prochiller.com

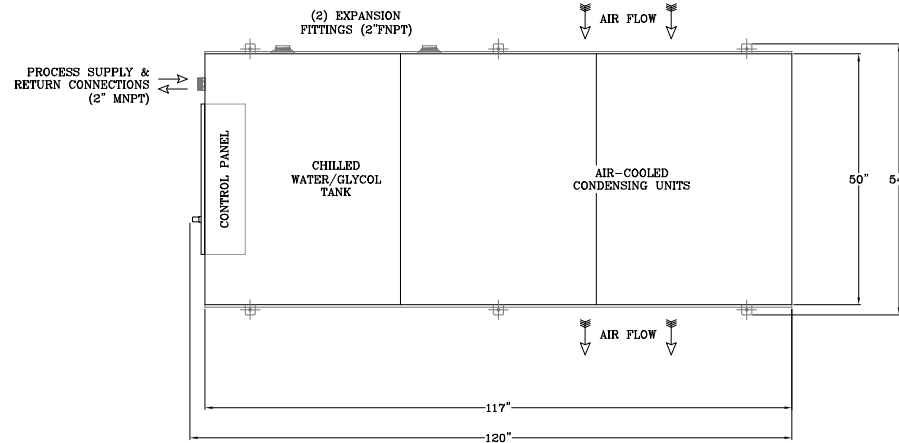

PLAN VIEW

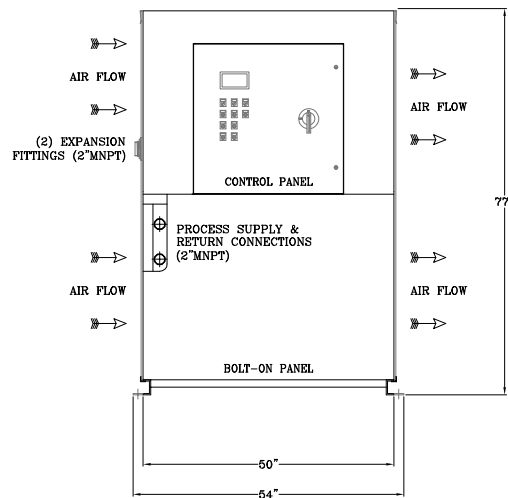

CONTROL PANEL END ELEVATION

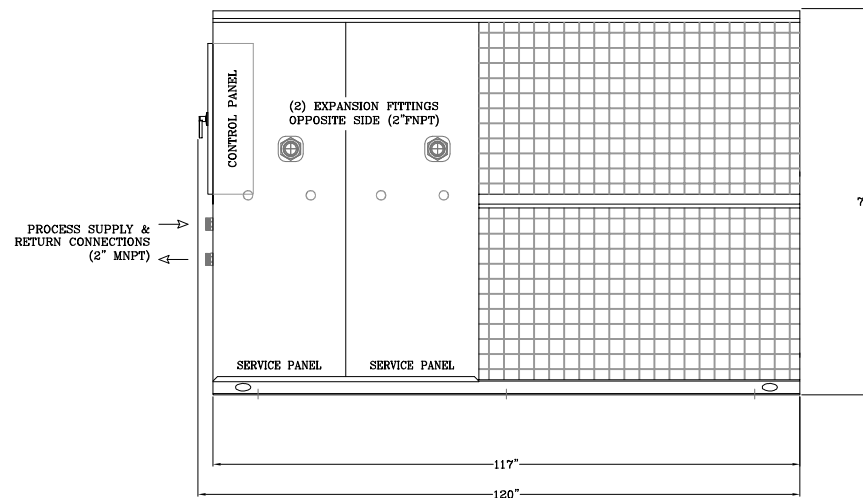

SIDE ELEVATION

**NOTES:**

**ELECTRICAL SPECIFICATIONS:**

MAIN VOLTAGE: 208-230V/3PH/60HZ  
 MINIMUM CIRCUIT AMPACITY (MCA): 132 AMPS  
 MAXIMUM OVERCURRENT PROTECTION (MOP): 176 AMPS

MAIN VOLTAGE: 460V/3PH/60HZ  
 MINIMUM CIRCUIT AMPACITY (MCA): 86 AMPS  
 MAXIMUM OVERCURRENT PROTECTION (MOP): 89 AMPS

**WEIGHT SPECIFICATIONS:**

ESTIMATED SHIPPING WEIGHT: APPROXIMATELY 3,000 LBS  
 ESTIMATED OPERATING WEIGHT: APPROXIMATELY 4,700 LBS

**COOLING CAPACITIES:**

AT 90 °F AMBIENT  
 25 °F GLYCOL: 195792 BTU/HR (57.4KW)  
 30 °F GLYCOL: 217526 BTU/HR (63.8KW)  
 35 °F GLYCOL: 240674 BTU/HR (70.5KW)

**SOUND PRESSURE LEVEL:**

83 dB @ 1m