

Drawing No.:

101104001

Customer:
SUBMITTAL

Pro Model:
PE205F2R4200-A


Drawn By: **MP** Date: **2/29/16**

Rev.	Date	Description
△	-	-

Notes:

- Options added to the chiller equipment (i.e. pumps, heat recovery, tank size, etc.) may affect the configuration (i.e. weight, dimensions, electrical requirements, etc.). Please verify final configuration of equipment.
- Dimensional tolerance: +/- 2" nominal.

PRO Refrigeration, Inc.
326 8th Street SW Auburn, WA 98001
T: (253) 735-9466 / F: (253) 735-2631
www.prochiller.com

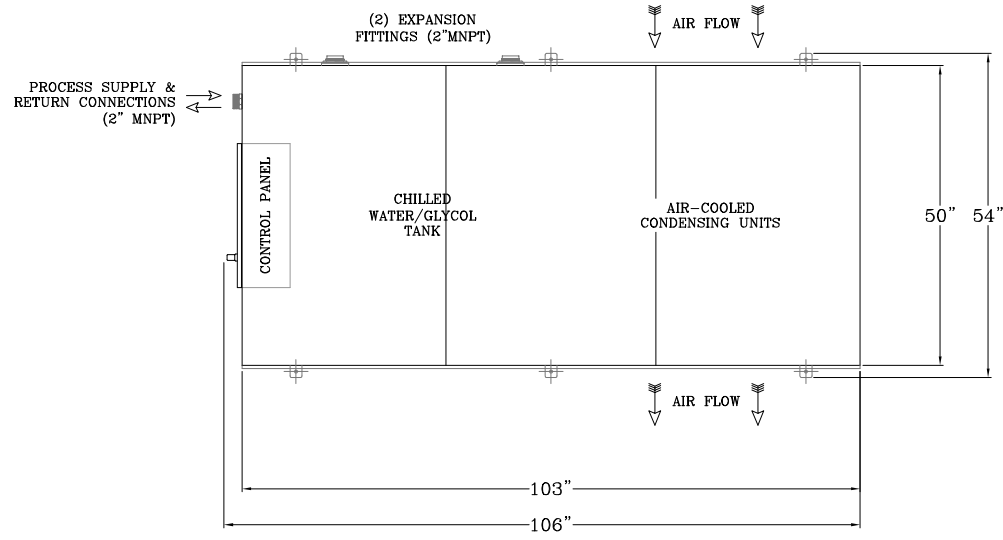

PLAN VIEW

NOTES:

ELECTRICAL SPECIFICATIONS:
 MAIN VOLTAGE: 208-230V/1PH/60HZ
 MINIMUM CIRCUIT AMPACITY (MCA): 89 AMPS
 MAXIMUM OVERCURRENT PROTECTION (MOP): 117 AMPS


MAIN VOLTAGE: 208-230V/3PH/60HZ
 MINIMUM CIRCUIT AMPACITY (MCA): 66 AMPS
 MAXIMUM OVERCURRENT PROTECTION (MOP): 88 AMPS

MAIN VOLTAGE: 460V/3PH/60HZ
 MINIMUM CIRCUIT AMPACITY (MCA): 33 AMPS
 MAXIMUM OVERCURRENT PROTECTION (MOP): 44 AMPS


WEIGHT SPECIFICATIONS:
 ESTIMATED SHIPPING WEIGHT: APPROXIMATELY 2,400 LBS
 ESTIMATED OPERATING WEIGHT: APPROXIMATELY 4,100 LBS

COOLING CAPACITIES:
 AT 90 °F AMBIENT
 25 °F GLYCOL: 65600 BTU/HR (19.2KW)
 30 °F GLYCOL: 72200 BTU/HR (21.2KW)
 35 °F GLYCOL: 79200 BTU/HR (23.2KW)

SOUND PRESSURE LEVEL:
 79 dB @ 1m

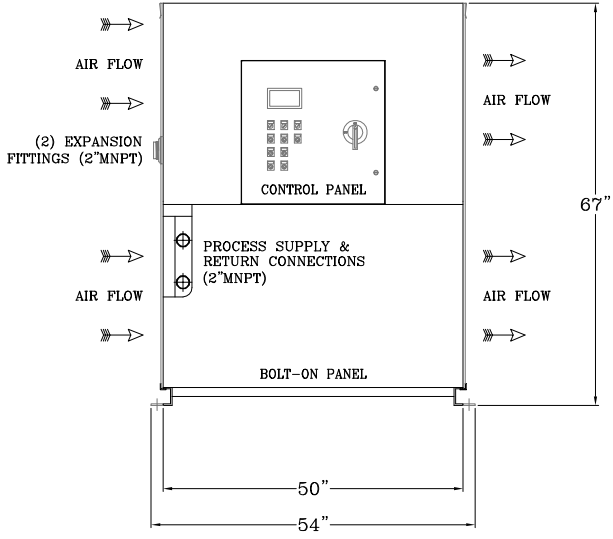

CONTROL PANEL END ELEVATION

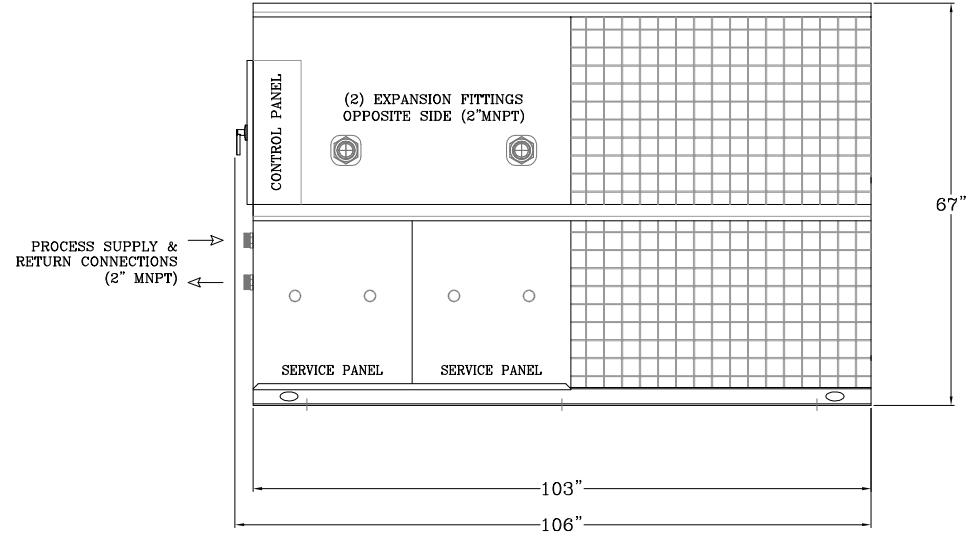

SIDE ELEVATION