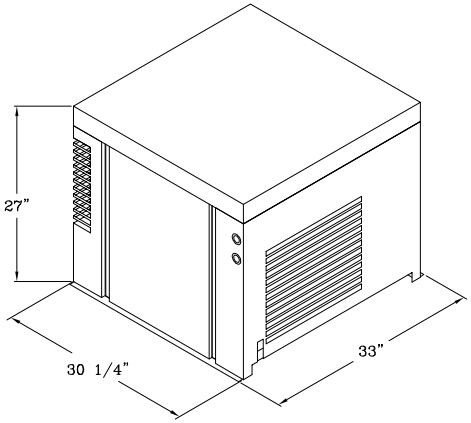


ISOMETRIC VIEW

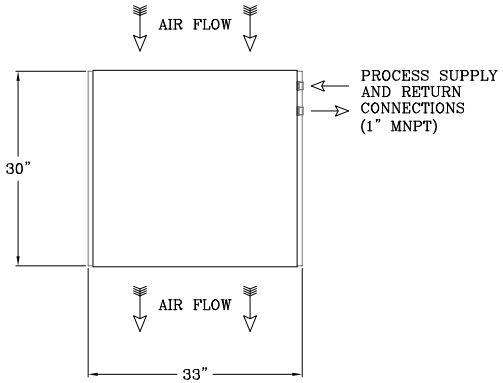


PLAN VIEW

NOTES:

ELECTRICAL SPECIFICATIONS:
MAIN VOLTAGE: 120V/1PH/60HZ
MINIMUM CIRCUIT AMPACITY (MCA): 25 AMPS
MAXIMUM OVERCURRENT PROTECTION (MOP): 30 AMPS

MAIN VOLTAGE: 208-230V/1PH/60HZ
MINIMUM CIRCUIT AMPACITY (MCA): 15 AMPS
MAXIMUM OVERCURRENT PROTECTION (MOP): 15 AMPS

WEIGHT SPECIFICATIONS:
ESTIMATED SHIPPING WEIGHT: APPROXIMATELY 400 LBS
ESTIMATED OPERATING WEIGHT: APPROXIMATELY 400 LBS

COOLING CAPACITIES:
AT 90 °F AMBIENT
25 °F GLYCOL: 5500 BTU/HR (1.6 KW)
30 °F GLYCOL: 6090 BTU/HR (1.8 KW)
35 °F GLYCOL: 6600 BTU/HR (1.9 KW)

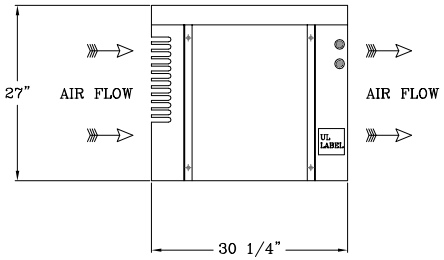


SIDE ELEVATION

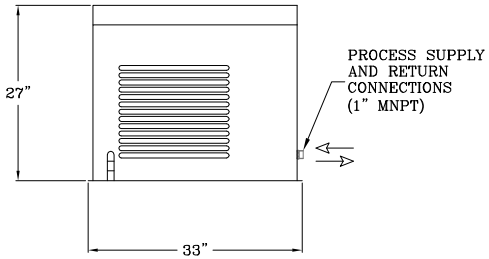


FRONT ELEVATION

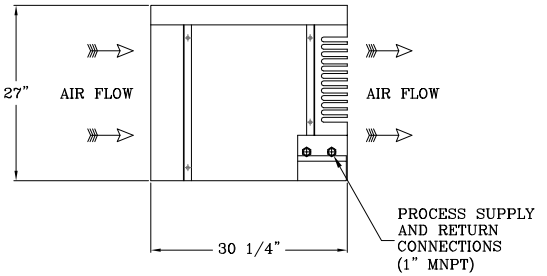


SIDE ELEVATION

Title:

# Chill & Flow

Model:

## PE1008B1R405-A

| Drawn By: | Date: |
|---|---|
| MP | 2/16/16 |

| Rev. | Date | Description |
|---|---|---|
| 2 | 2/13/14 | Hood Revision |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Notes:

1. Options added to the chiller equipment (i.e. pumps, heat recovery, tank size, etc.) may affect the configuration (i.e. weight, dimensions, electrical requirements, etc.). Please verify final configuration of equipment.

2. Dimensional tolerance: +/- 2" nominal.

PRO Refrigeration, Inc.
326 8th Street SW Auburn, WA 98001
T: (253) 735-9466 / F: (253) 735-2631
www.prochiller.com

PRO CHILLER • SYSTEMS